



www.ledwork.net



L4T742

25W Trofazni šinski reflektor
3000K CRI95/2464lm CRI80/3150lm
4000K CRI95/2635lm CRI80/3280lm
LUMINUS CXM-9 Gen3 LED / HEP driver
Izmenjivo sočivo 36° ili 17°
Mogućnost rotacije 350°/60°
IP20
R75 x 138 x 217mm
GLOBAL GA69 adapter



L4T707



31W Trofazni šinski reflektor
3000K CRI95/3452lm CRI80/3870lm
4000K CRI95/3678lm CRI80/4581lm
LUMINUS CXM-14 Gen3 LED / TRIDONIC driver
Opcija dimovanja (Triac dimmable)
Sočivo 36°
Mogućnost rotacije 350°/60°
IP20
R85 x 138 x 165mm
GLOBAL GA69 adapter



Rio


Rio








TLL40

40W Trofazni šinski reflektor
 3000K CRI80/4680lm
 4000K CRI80/4960lm
 EPISTAR SMD LED / OSRAM driver
 Sočivo 90° x 60°
 IP20
 Mogućnost horizontalne rotacije
 60 x 86 x 370mm

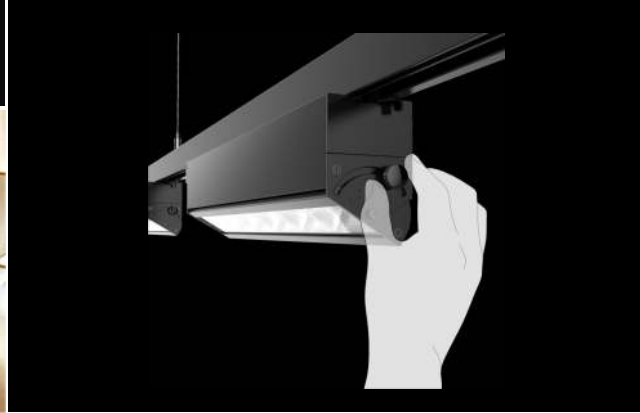

Trofazne šine i oprema (GLOBAL standard)

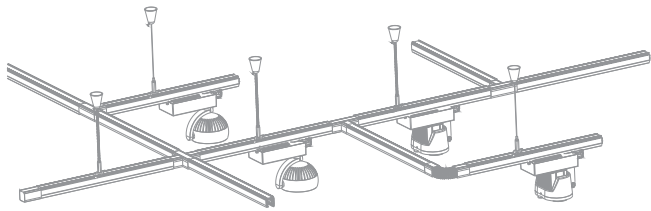

LTL23


35W Trofazni šinski reflektor
 3000K CRI80/2800lm
 4000K CRI80/3300lm
 CITIZEN COB LED / TRIDONIC driver
 Sočivo 36°
 Mogućnost rotacije 320°/60°
 IP20
 R95 x 173 x 120mm



ECONOMY
MODEL




zoom



LTL56

15W Trofazni šinski reflektor - Zoom
3000K CRI80/1500lm
4000K CRI80/1600lm
CITIZEN COB LED / CE driver
Zoom sočivo 15-60°
Mogućnost rotacije 320°/60°
IP20
R65 x 234 x 137mm



LTL228



30W Trofazni šinski reflektor
3000K CRI80/3000lm
4000K CRI80/3300lm
EDISON COB LED / CE driver
Izmenljivo sočivo 36° ili 60°
Mogućnost rotacije 320°/60°
IP20
R100 x 302 x 211mm

ECONOMY
MODEL






LTL62






16W Trofazni šinski reflektor
 2700K CRI80/1000-1080lm
 CITIZEN COB LED / CE driver
 Sočivo 36°
 Mogućnost rotacije 350°/90°
 IP20
 R46 x 196 x 200mm



LTL79

25W Trofazni šinski reflektor
 3000K
 CRI80/2800-2950lm
 EDISON COB LED / CE driver
 Sočivo 36°
 Mogućnost rotacije 350°/90°
 IP20
 R120 x 43 x 207mm
 Boja kućišta: bela, crna



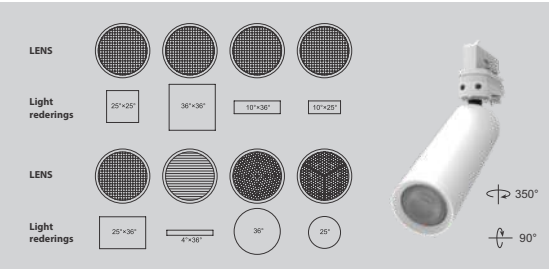

LTL40A



10W Trofazni šinski reflektor
3000K/550-700lm
CRI80

CREE COB LED / CE driver

Izmenjivo sočivo:

- okruglo: 25°/36°;

- kvadratno: 25°*25°/36°*36°;

- pravougaono: 4°*36°/10°*25°/10°*36°/25°*36°

Mogućnost rotacije 350°/90°

IP20

R54 x 155 x 90mm



LDL297



15W Downlight

3000K

1050-1300lm


EDISON COB LED / CE driver

CRI80

Sočivo 36°

IP20

100 x 100 x 114 mm






RIO



ROZETNE ZA LLR21 MODUL



LDLA802



INSTALACIONI OTVOR 117mm




LDLA419



INSTALACIONI OTVOR 117mm



LDLA451



INSTALACIONI OTVOR 150mm

LLR21

31W Downlight modul
 3000K CRI95/3452lm CRI80/3870lm
 4000K CRI95/3678lm CRI80/4581lm
 LUMINUS CXM-14 Gen3 LED
 TRIDONIC driver
 Sočivo 40°
 IP20
 R80 x 116mm




ECONOMY
MODEL



LDL134



13W Downlight
 3CCT/3000K/4000K/5700K
 1030-1230lm
 CRI80
 Svetlosni ugao 90°
 IP54
 R145 x 97mm






LDL197




25W Downlight
 3CCT 3000K/4000K/5700K
 2150-2350lm
 2835 LED / CE driver
 CRI80
 Svetlosni ugao 60°
 IP40
 190 x 190 x 102 mm




LDL202

3,5W Downlight
 3000K
 300lm
 CRI80
 HONGLI SMD LED
 Svetlosni ugao 70°
 IP54
 R70 x 17mm




Kućište za
 nadgradnu montažu





LCL79


10W Downlight
3000K CRI80/890m
4000K CRI80/980lm
CITIZEN COB LED / CE driver
Sočivo 60°
IP40
R90 x 46mm



IP65 


LCL102

13W Downlight
3000K CRI80/1200m
4000K CRI80/1350lm
CREE COB LED / CE driver
Sočivo 60°
IP65
R110 x 50mm



LDL83

25W Downlight
3000K CRI80/2380m
4000K CRI80/2620lm
HONGLI SMD LED / CE driver
Sočivo 60°
IP20
R190 x 100mm






LAL120



25W Plafonjera
 3CCT
 2300-2900lm
 EDISON COB LED / CE driver
 CRI80
 Svetlosni ugao 120°
 IP54
 R300 x 54 mm
 Boja kućišta: crna




3 boje svetla u jednoj lampi: 3000K, 4000K, 5700K



LAL25




18W Plafonjera
 3000K CRI80/1650m
 4000K CRI80/1700lm
 HONGLI SMD LED / CE driver
 Svetlosni ugao 120°
 IP40
 R300 x 48mm





LAL37  

15W Plafonjera
 3000K CRI80/1740m
 4000K CRI80/1950lm
 HONGLI SMD LED / CE driver
 Svetlosni ugao 100°
 IP40
 R300 x 33mm




CE




LAL87   

25W / 30W Plafonjera
 3CCT 3000K/4000K/5700K
 2680-3000lm
 CRI80
 HONGLI SMD LED / CE driver
 Svetlosni ugao 120°
 IP54
 R275 x 65mm (25W)
 R350 x 65mm (30W)




CE


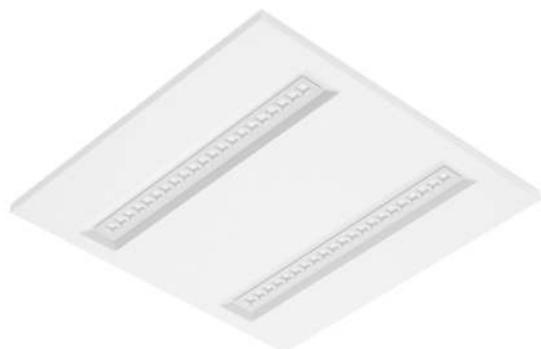


LPL6060A  

35W Panel
 3000K CRI80/3570m
 4000K CRI80/3850lm
 HONGLI SMD LED / CE driver
 Svetlosni ugao 100°
 IP40
 595 x 595 x 28mm



CE



LPD02





18W Svetiljka/luster
 3000K CRI80/1450m
 4000K CRI80/1600lm
 HONGLI COB LED / CE driver
 Svetlosni ugao 36°
 IP20
 R80 x 160mm (H1080mm)



LPD12

5W Svetiljka/luster
 2700K CRI80/480-600m
 CITIZEN COB LED / CE driver
 Svetlosni ugao 24°
 IP20
 R39 x 300mm (H1080mm)

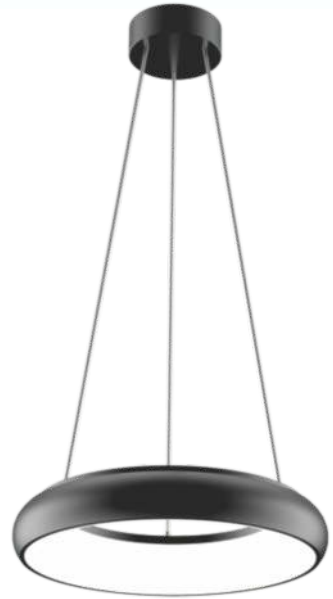

LAL24



25W Plafonjera/luster
 3000K CRI80/1850m
 4000K CRI80/2000lm
 HONGLI SMD LED / CE driver
 Svetlosni ugao 120°
 IP40
 R298 x 50mm (H1500mm)






LPD05




25W Svetiljka/luster
3CCT 3000K/4000K/5700K
2250-2650lm
CRI80
HONGLI COB LED / CE driver
Svetlosni ugao 60° / UGR19
IP20
R213 x 127mm



LDL115




18W Svetiljka
3CCT 3000K/4000K/5700K
1440-1690lm
CRI80
HONGLI COB LED / CE driver
Svetlosni ugao 90°
IP54
R170 x 124mm



LDL176



15W Svetiljka
2700K
1300-1750lm
CITIZEN COB LED / CE driver
CRI80
Svetlosni ugao 36°
IP54
R100 x 134 mm







LDL105



18W Downlight
3000K
1950-2070lm
CRI80
HONGLI SMD LED / CE driver
Svetlosni ugao 90°
IP54
190 x 190 x 40mm

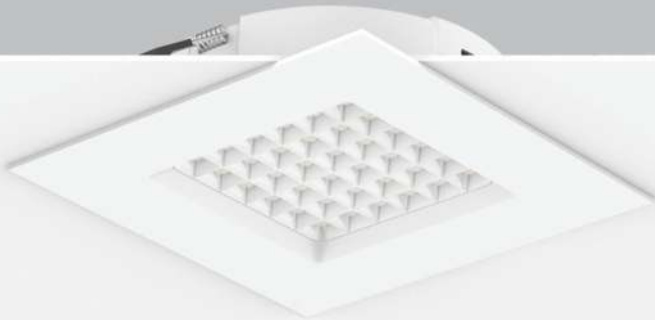


Ultra tanka integrisana ugradna svetiljka za ugradnju u plitke plafone.



ECONOMY
MODEL

LDL210-18


18W Downlight
3CCT 3000K/4000K/5700K
1700-2000lm
CRI80
HONGLI SMD LED / CE driver
Svetlosni ugao 90°
IP54
R145 x 30mm



ECONOMY
MODEL

LDL210-35

35W Downlight
3CCT 3000K/4000K/5700K
3300-3900lm
CRI80
HONGLI SMD LED / CE driver
Svetlosni ugao 90°
IP54
R225 x 34mm






LDL229





18W Downlight
 2700K
 2000lm
 CRI80
 EDISON COB LED / CE driver
 Svetlosni ugao 60°
 IP54
 R145 x 65mm




LCL76



10W Downlight
 Dim to Warm 1800-3000K
 450lm
 CRI90
 CITIZEN LED / CE driver
 Svetlosni ugao 60°
 IP54
 R95 x 55mm

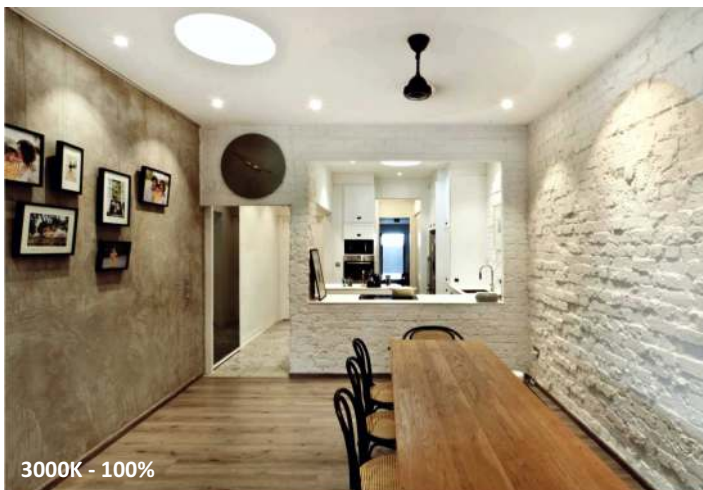

3000K - 100%

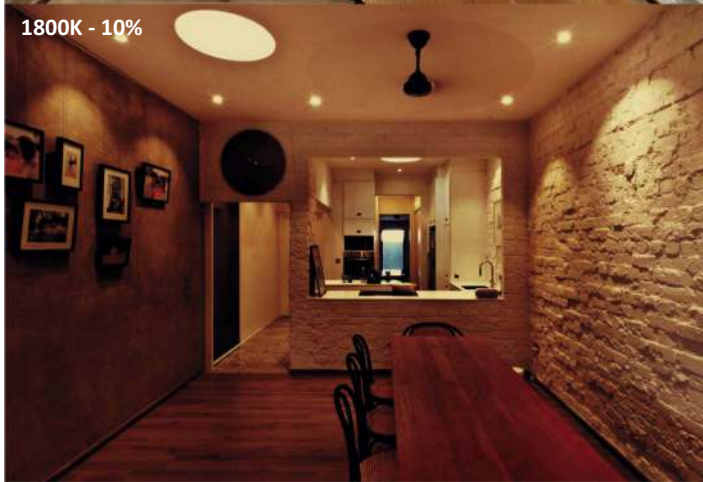

1800K - 10%




LDL104



10W Downlight
 2700K
 860-1000lm
 CRI80
 HONGLI SMD LED / CE driver
 Svetlosni ugao 60°
 IP65
 90 x 90 x 49mm


IP65



LDL190



10W Downlight
 3000K
 1000lm
 CRI80
 HONGLI SMD LED / CE driver
 Svetlosni ugao 60°
 IP20
 R100 x 60mm





ECONOMY
 MODEL

LDL261A



8W Downlight
 3CCT 3000K/4000K/5700K
 700-750lm
 CRI80
 HONGLI SMD LED / CE driver
 Svetlosni ugao 70°
 IP54
 R106 x 47mm





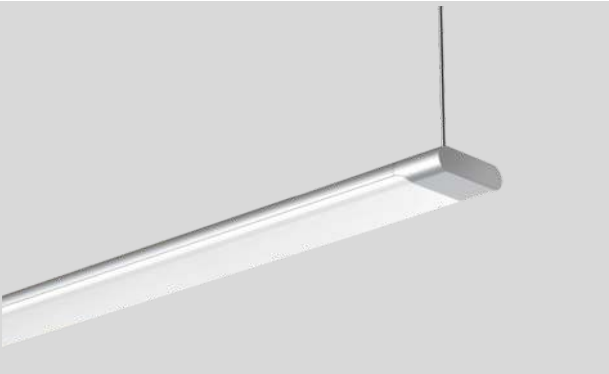

LDB05




30W Svetiljka/visilica
4000K
2600-2630lm
CRI80
HONGLI COB LED / CE driver
Svetlosni ugao 120°
IP20
900 x 90 x 28mm

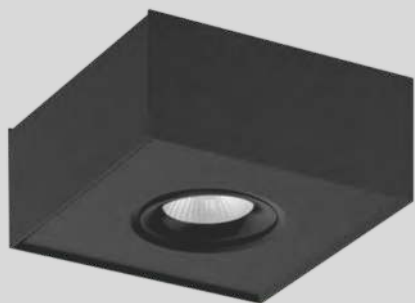

LDL259



8W Downlight
2700K
CRI80/570-670lm
EDISON COB LED / CE driver
Svetlosni ugao 30°
IP20
135 x 135 x 60mm





LHB500

41W Visilica

3000K CRI95/4440lm CRI80/5980lm

4000K CRI95/4700lm CRI80/6250lm

LUMINUS CXM-14 Gen3 LED / TRIDONIC driver

Svetlosni ugao 60°

IP20

R308 x 329mm

76W Visilica

3000K CRI95/7160lm CRI80/9120lm

4000K CRI95/8390lm CRI80/9740lm

LUMINUS CXM-18 Gen3 LED / TRIDONIC driver


Senilo 60°

IP20

R308 x 329mm


CE

RIO

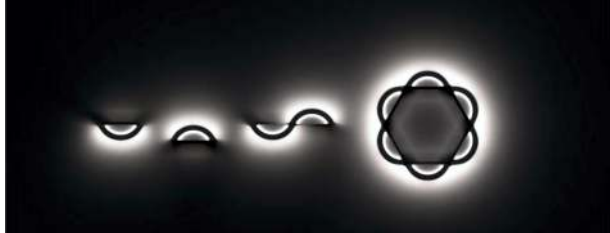


LWL46

10W Zidna svetiljka
3000K/490-530lm
CRI80
2835 SMD LED / CE driver
Svetlosni ugao 50°
IP65
204 x 81 x 78mm



LWL59



5W Zidna svetiljka
3000K/150-220lm
CRI80
2835 SMD LED / CE driver
Svetlosni ugao 60°
IP65
R114 x 37mm






LWL03

3W Zidna ugradna svetiljka
3000K/200lm
CRI80
HONGLI SMD LED / EAGLE RISE driver
Svetlosni ugao 60°
IP65
84 x 84 x 50mm






LWL07

8W Zidna svetiljka
3000K/600-655lm
CRI80
HONGLI SMD LED / CE driver
Difuzor 120°
IP65
170 x 140 x 59mm



LWL20


10W Zidna svetiljka
3000K/750-900lm
CRI80
HONGLI SMD LED / CE driver
Svetlosni ugao 15° - 120°
IP65
120 x 97 x 100mm





ZOUS II

9W Spot reflektor
3000K
12000lx
CRI80
OSRAM LED / CE driver
Svetlosni ugao 3°
IP65
R84 x 84mm




IP65



LML07

6W Baštenska lampa
3000K
500lm
CRI80
HONGLI SMD LED / 12VAC/DC
Svetlosni ugao 30°
IP65
R76 x 262mm



IP65





LW/CL-6W

6W Svetiljka za hodnik
3000K
500lm
CRI80
EPISTAR SMD LED / CE driver
Svetlosni ugao 116°
IP20
R110 x 70mm

CE

IP65





LW/CL-8W-RGBW

8W Prozorska svetiljka
RGBW
600lm
CRI80
CREE SMD LED / CE driver
Svetlosni ugao 116°
IP65
R148 x 60 x 100mm

CE

IP65





FLP50

50W Reflektor
 5000K
 5000lm
 CRI80
 LUMENMAX 3030 LED /CE driver
 Svetlosni ugao 100°
 IP65
 1500 x 97 x 82mm

ECONOMY
MODEL

IP65

LYL08-1500

54W Linijska svetiljka
 4000K
 7020lm
 CRI80
 PHILIPS LED / OSRAM driver
 Svetlosni ugao 120°
 IP66
 1500 x 97 x 82mm



IP66



LDB129

40W Linijska svetiljka
 4000K
 4100-4500lm
 CRI80
 EDISON COB LED / CE driver
 Svetlosni ugao 120°
 IP66
 1200 x 70 x 57mm

CE



IP66

Mogućnost povezivanja





LBLP-50

50W Ulična svetiljka

4000K

5600-6300lm



CRI80

PHILIPS SMD 5050 LED / CE driver

Svetlosni ugao 150°x 55°

IP66

479 x 211 x 114mm

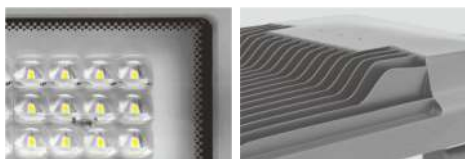




LEM3

2W Panik lampa
6000K
200lm
Vreme rada: 3h
IP65
340 x 105 x 62mm




LEM4

2W Panik lampa
6000K
240lm
Vreme rada: 3h
IP20
148 x 148 x 48mm



LEX3

2W Panik lampa
6000K
200lm
Vreme rada: 3h
IP65
321 x 194 x 108mm







2216 LED trake

60 LED - 4.8W/m - 400lm/m
120 LED - 9.6W/m - 800lm/m
240 LED - 19.2W/m - 1600lm/m
2700K - 4000K
CRI90
REFOND 2216 LED
Svetlosni ugao 120°
IP20
5000 x 8mm

2835 LED trake

60 LED - 9W/m - 650lm/m
120 LED - 17W/m - 1300lm/m
2200K - 3000K - 4000K - 5000K
CRI80
REFOND 2835 LED
Svetlosni ugao 120°
IP20
5000 x 8mm

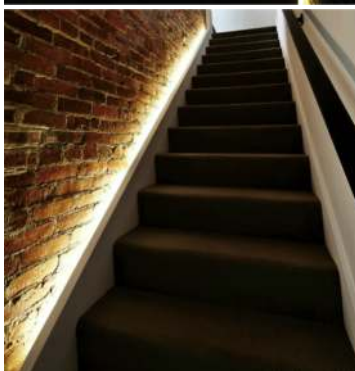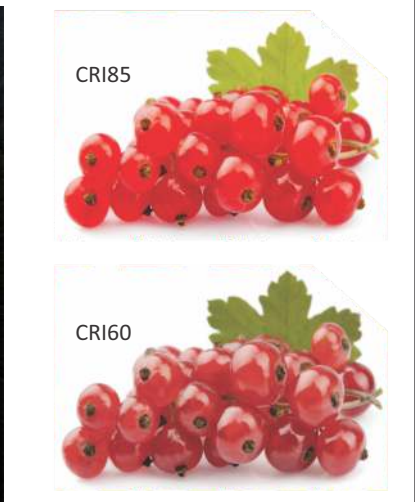

LED Neon



Savitljiva, otporna na udarce i visoke temperature



Široka paleta boja



Homogena svetlost (*dot free*)



Mogućnost skraćivanja na 25mm



Mogućnost upravljanja sistemima za kontrolu rasvete



Obeleženo sečenje na svake 3 diode

LED dimabilna napajanja

LTE40-12 - 40W - 3,34A - 168 x 44 x 30mm

LTE75-12 - 75W - 6,25A - 179 x 56 x 30mm

LTE150-12 - 150W - 12,5A - 235 x 66 x 36mm

Interfejs za dimovanje: Triac/ELV, AC Push-Dim.

Leading edge/trailing edge Triac dimovanje.

PWM digitalno dimovanje.

1-kanalni izlaz konstantnog napona.

Zaštita od pregrevanja / preopterećenja / kratkog spoja.

Automatsko restartovanje.




LED kontroleri

Niskonaponski i visokonaponski kontroleri za regulaciju rasvete (ugradne, nadgradne svetiljke, LED trake...).

Upravljanje Tuya aplikacijom, daljinskom komandom.

WiFi ili Bluetooth povezivanje.

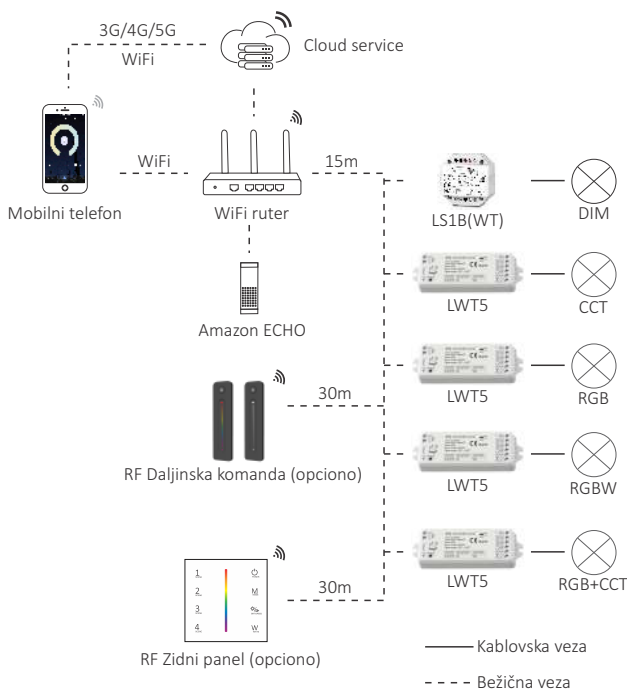

LWB1 - 1/2 kanala, CCT, 2x5A, 12/36V

LWB5 - RGB, RGBW, RGB+CCT, 5x3A, 12/24V



LWT1 - 1/2 kanala, CCT, 2x5A, 12/36V

LWT5 - RGB, RGBW, RGB+CCT, 5x3A, 12/24V



LE1-C - Touch dimer za LED traku, 3A, 12/24V




LS1-B - 1 kanal, dimmer, 1.5A, 220VAC

LSS-B - 1 kanal, switch, 1.5A, 220VAC



LS1-B - Swipe hand prekidač za LED traku, 4A, 12/24V

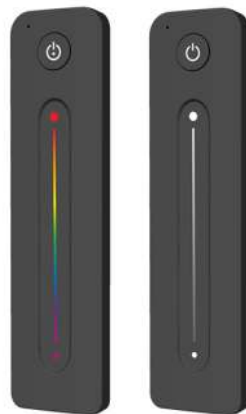

LR13 - RF daljinska komanda za RGB kontroler (WT5/WB5)

LR11 - RF daljinska komanda za dimer (WT1/WB1)

ledworkCONTROL



Projektovanje i proizvodnja sistema za kontrolu rasvete (DALI, DMX...)

Niskonaponski DMX RGBW kontroleri
12/24VDC
4x72W

DMX Master kontroleri
Windows App
IR daljinska komanda

Niskonaponski DALI kontroleri
12/24VDC
72/144W po kanalu
1Ch, 2Ch, 3Ch, 4Ch
White/Warm White kontrola
RGB, RGBW kontrola

Visokonaponski DALI kontroleri
220VAC
300/500W po kanalu
1Ch, 3Ch (DIN-Rail)
Dimmer/Switch mode

DALI Master kontroleri
USB/LAN
Windows App
IR daljinska komanda
Moduli za prekidač/taster kontrolu

